



Horizontal section h1.1

Detail fixing points at vertical joints

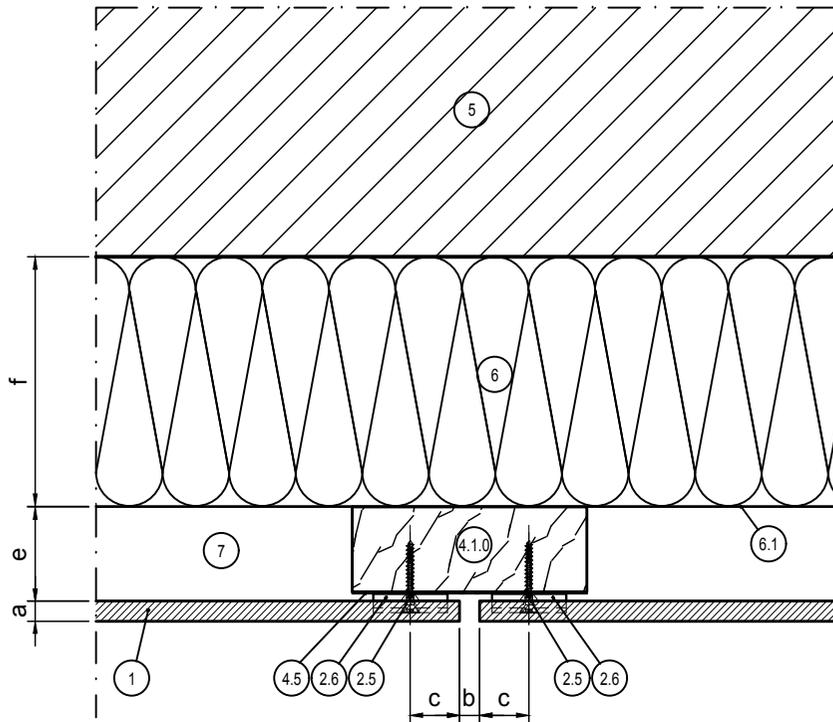

Detail fixing points at continuous panels

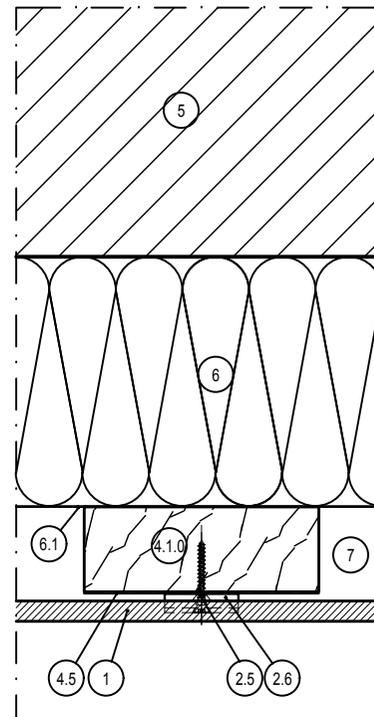


LEGEND:	
1	Trespa® PURA NFC® panel
2.5	Counter sunk screw (WÜRTH 0.137x1.18 inch, AW 20)
2.6	Universal clip
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
b	Joint width 0.3 inch. Based on applicable building standards, regulations or certificates, wider joints may be permissible
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)

Building / Department	Alg.	TRESPA	Remarks
Revision			A3 PURA FS h1.1 0
Drawn	Jan de Jonge	Passagen	Size
Date	JAN 2016	i.s.o.	Number
Scale	1:2	Name	Revision
			Sheet
		Facade cladding with Trespa®	
		PURA FLUSH Siding	
		Detail h1.1 - Joint vertical	

Horizontal section h2.1

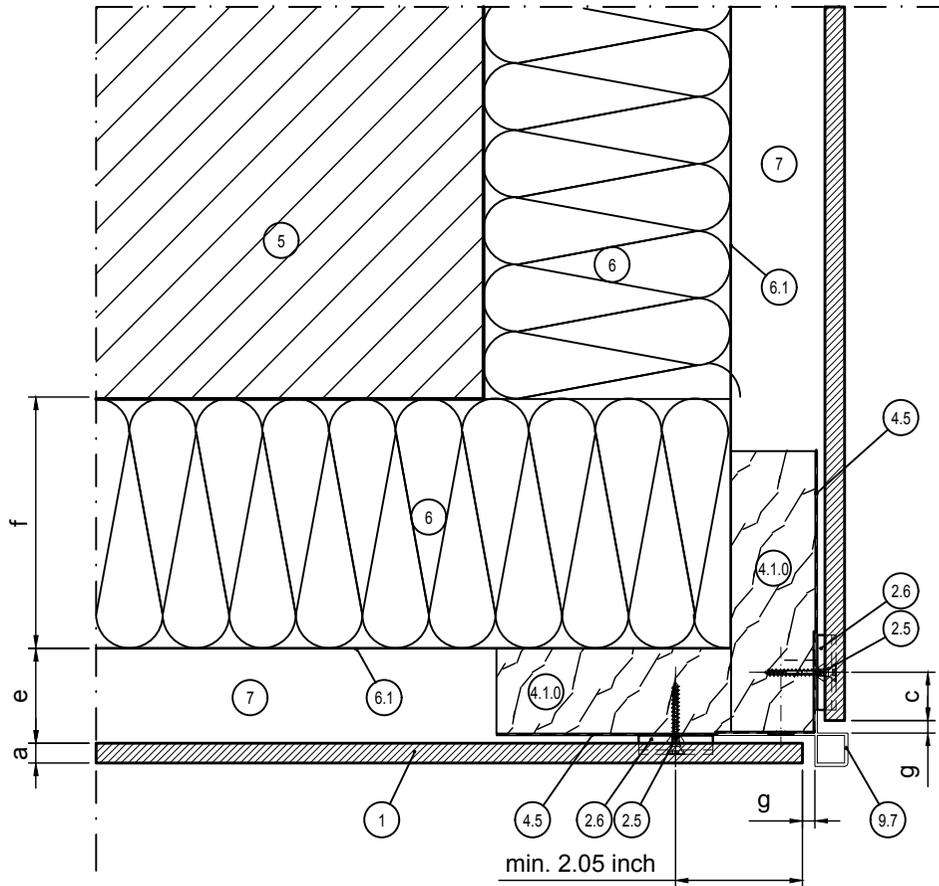


LEGEND:	
1	Trespa® PURA NFC® panel
2.5	Counter sunk screw (WÜRTH 0.137x1.18 inch, AW 20)
2.6	Universal clip
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity
9.7	Outer corner profile (PROFACE® CORNEX C128-A)

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)
g	Distance min. 2 inch

Building / Department	Alg.		TRESPA		Remarks
Revision	Drawn	Jan de Jonge	Passingen	A3	PURA FS h2.1
Date	Date	JAN 2016	r.s.o.	Size	Number
Scale	Name	1:2	Façade cladding with Trespa® PURA FLUSH Siding		
Date	Detail h2.1 – External corner				

Horizontal section h3.1

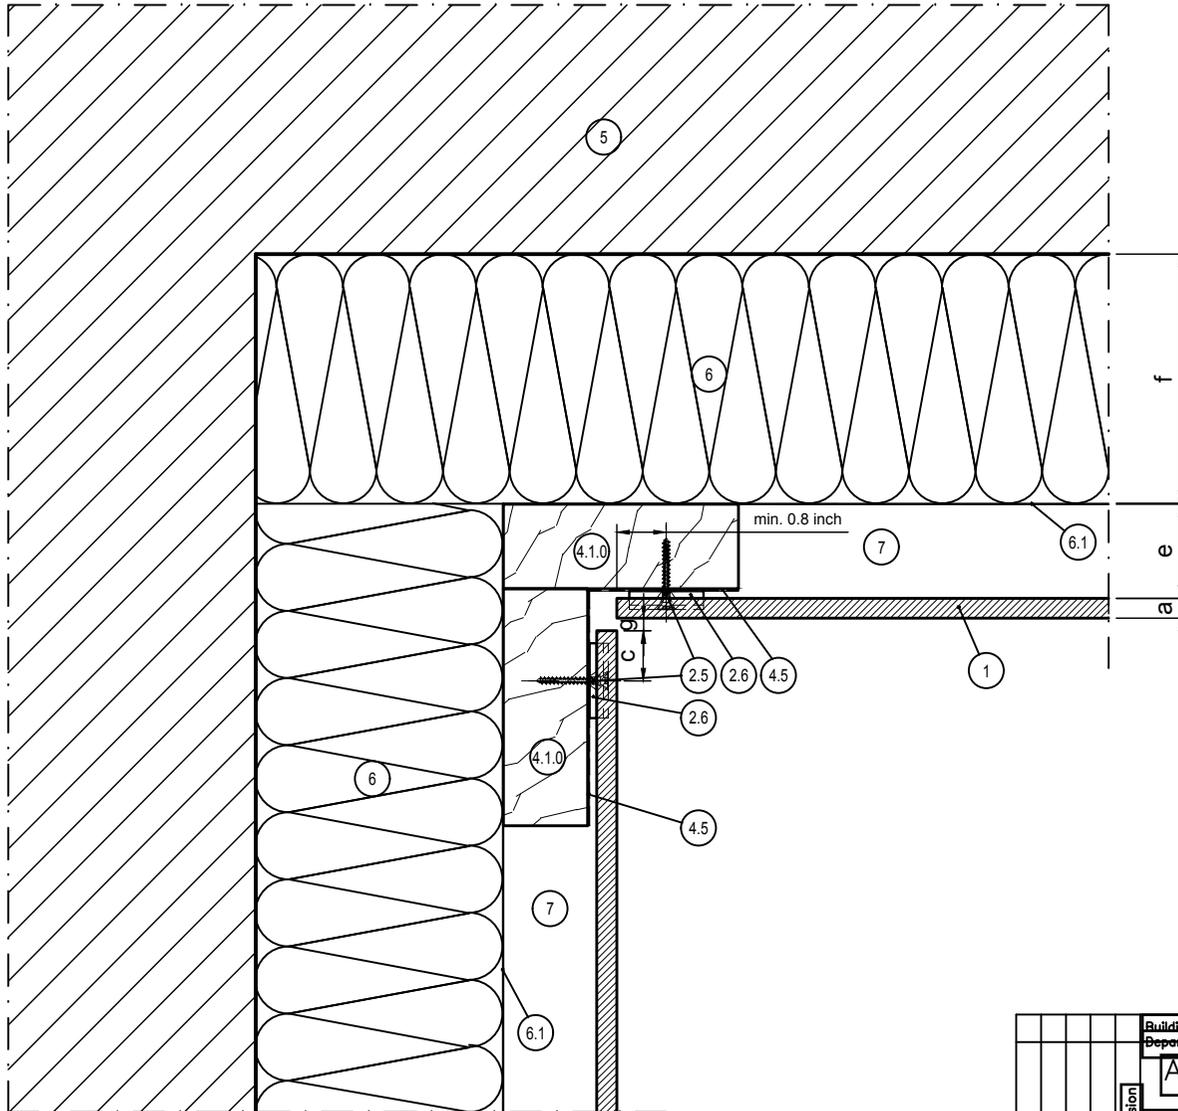


LEGEND:	
1	Trespa® PURA NFC® panel
2.5	Counter sunk screw (WÜRTH 0.137x1.18 inch, AW 20)
2.6	Universal clip
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch²/foot
f	Insulation (thickness)
g	Distance min. 2 inch

Building / Department	Alg.	TRESPA®	Remarks
Revision	Drawn Jan de Jonge	Passagen	A3 PURA FS h3.1 0
Date	JAN 2016	i.s.o.	Size Number Revision Sheet
Scale	1:2	Name	Facade cladding with Trespa® PURA FLUSH Siding
Date			Detail h3.1 – Internal corner

Horizontal section h4.1

LEGEND:	
1	Trespa® PURA NFC® panel
2.5	Counter sunk screw (WÜRTH 0.137x1.18 inch, AW 20)
2.6	Universal clip
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity
9.1	Window sill
9.4	Wind seal
9.7	Outer corner profile (PROFACE® CORNEX C128-A)


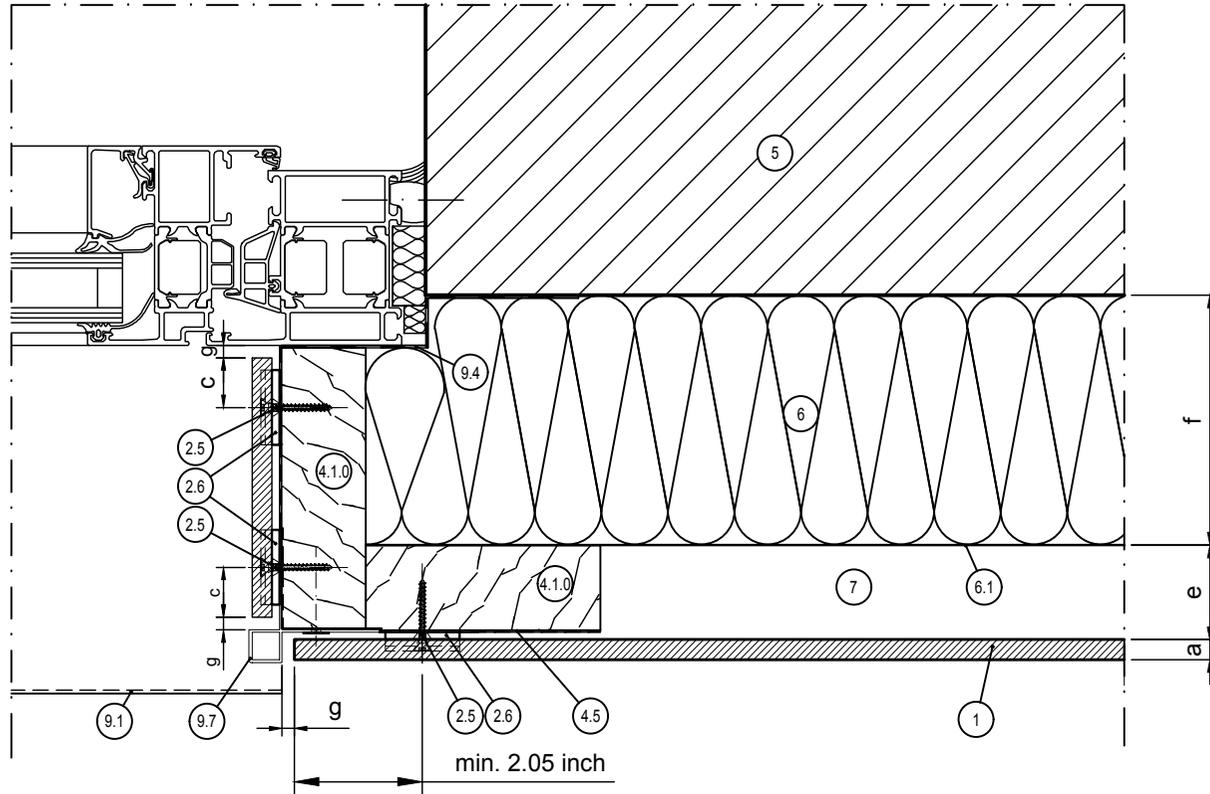


GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)
g	Distance min. 2 inch


Building / Department	Alg.	TRESPA®	Remarks
Revision	Drawn Jan de Jonge	Passagen	A3 PURA FS h4.1 0
Date	JAN 2016	i.s.o.	Size Number Revision Sheet
Scale	1:2	Name	Facade cladding with Trespa® PURA FLUSH Siding
Date			Detail h4.1 - Window embrasure

Maximum panel size and maximum fixing distance for façade cladding with Trespa® PURA NFC® please refer to the installation guidelines.

View

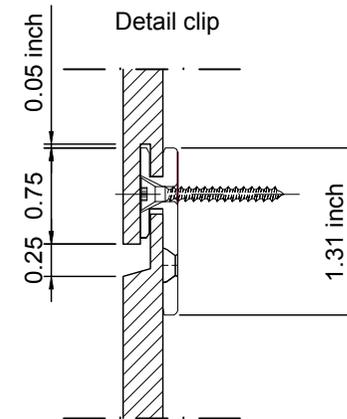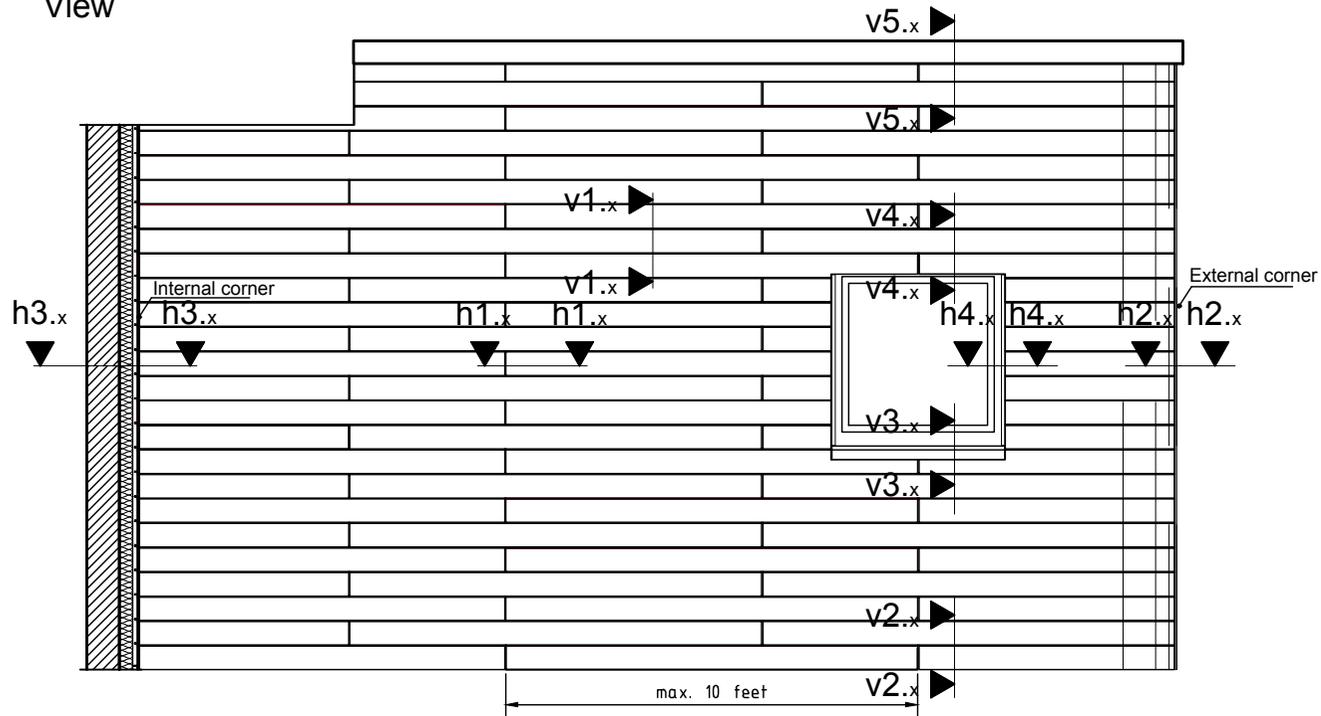


Top view

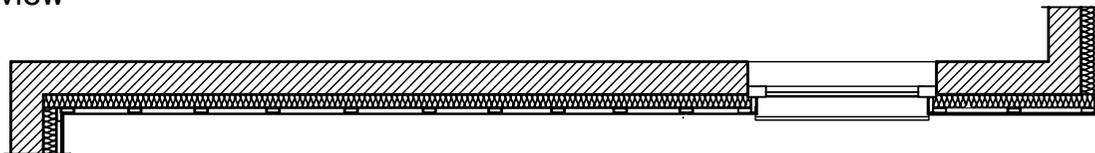

Building / Department		TRESPA		Remarks	
Alg.		A3 PURA FS 02		10	
Revision	Drawn Jan de Jonge	Passingen	Size	Number	Revision
Date	JAN 2016	r.s.o.			Sheet
Scale		Name	Façade cladding with Trespa®		
			PURA FLUSH Sliding		
			Overview 3D		

Vertical section v1.1

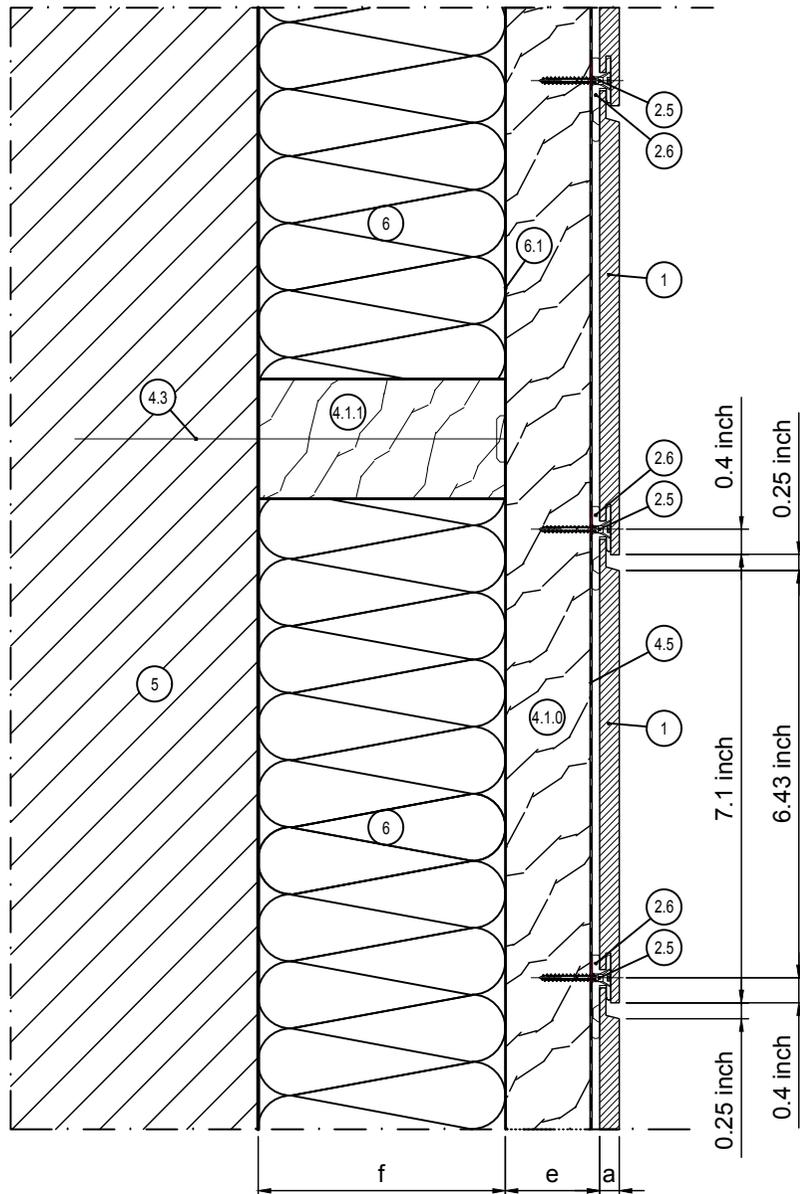


LEGEND:	
1	Trespa® PURA NFC® panel
2.5	Counter sunk screw (WÜRTH 0.137x1.18 inch, AW 20)
2.6	Universal clip
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)

Building / Department	Alg.	TRESPA	Remarks	
Revision			A3	PURA FS v1.1 0
Drawn	Jan de Jonge	Passingen	Size	Number
Date	JAN 2016	r.s.o.	Revision	Sheet
Scale	1:2	Name	Façade cladding with Trespa®	
			PURA FLUSH Siding	
			Detail v1.1 - Panel overlap	

Copyright © 2015 by Trespa International B.V. This print is generated by you from www.trespa.info. By accessing www.trespa.info and printing this document you have accepted the Terms of Use (disclaimer) of www.trespa.info. Please refer to mentioned website for all conditions that apply to this document. Not all the systems shown in this document may be suitable for all applications and jurisdictions. We provide you with testing code and design data for informational purposes only and strongly recommend that you or any other user of this document obtains independent advice regarding compliance with design requirements, applicable codes, laws and regulations, and test standards. Please check your local codes and design requirements for proper use. Trespa International B.V. disclaims all liability in relation to your use of this document.

Vertical section v2.1

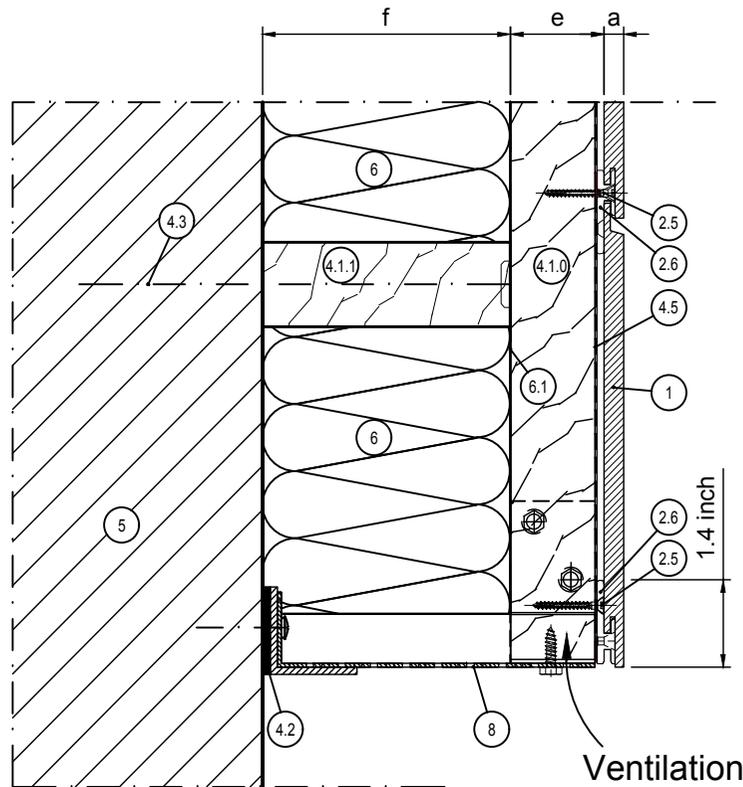


LEGEND:	
1	Trespa® PURA NFC® panel
2.5	Counter sunk screw (WÜRTH 0.137x1.18 inch, AW 20)
2.6	Universal clip
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.2	Thermal isolator
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
8	Perforated angle closure

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)

Building / Department	Alg.	TRESPA	Remarks	
Revision			A3	PURA FS v2.1 0
Drawn	Jan de Jonge	Passingen	Size	Number
Date	JAN 2016	i.s.o.	Revision	Sheet
Scale	1:2	Name	Façade cladding with Trespa®	
Date			PURA FLUSH Siding	
			Detail v2.1 - Façades base	

Vertical section v3.1

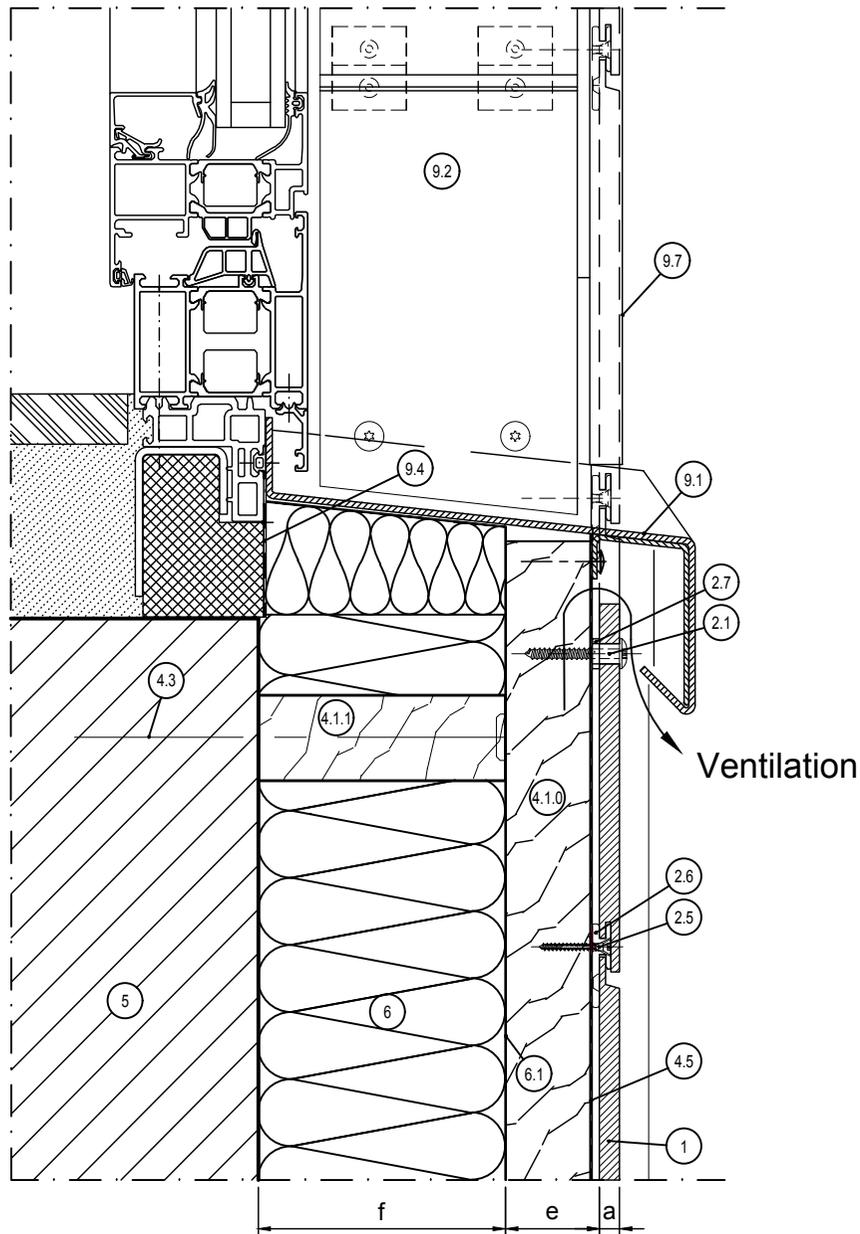


LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
2.5	Counter sunk screw (WÜRTH 0.137x1.18 inch, AW 20)
2.6	Universal clip
2.7	Installation ring
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity
9.1	Window sill
9.2	Window reveal with TRESPA®
9.4	Wind seal
9.7	Outer corner profile (PROFACE® CORNEX C128-A)

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)

Building / Department	Alg.		TRESPA®		Remarks
Revision	Drawn	Jan de Jonge	Passagen	A3	PURA FS v3.1
Date	Date	JAN 2016	i.s.o.	Size	Number
Scale	Name	1:2	Façade cladding with Trespa®		
			PURA FLUSH Siding		
			Detail v3.1 - Window sill		
			Revision	10	Sheet

Vertical section v4.1

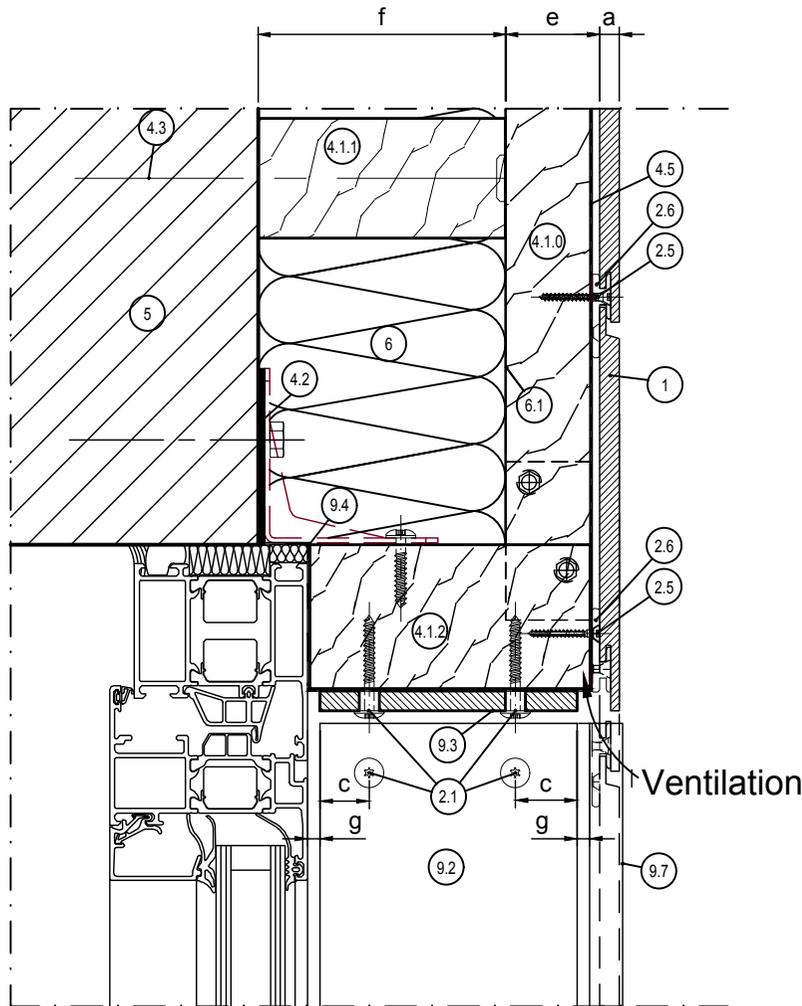


LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
2.5	Counter sunk screw (WÜRTH 0.137x1.18 inch, AW 20)
2.6	Universal clip
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.1.2	Partial wooden substructure
4.2	Thermal isolator
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
9.2	Window reveal with TRESPA®
9.3	Window head with TRESPA®
9.4	Wind seal
9.7	Outer corner profile (PROFACE® CORNEX C128-A)

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)
g	Distance min. 2 inch

Building / Department	Alg.		TRESPA®		Remarks
Revision	Drawn	Jan de Jonge	Passingen	A3	PURA FS v4.1
Date	Date	JAN 2016	i.s.o.	Size	Number
Scale	Name	1:2	Facade cladding with Trespa®		
Date	PURA FLUSH Siding				
	Detail v4.1 - Window head				

Vertical section v5.1

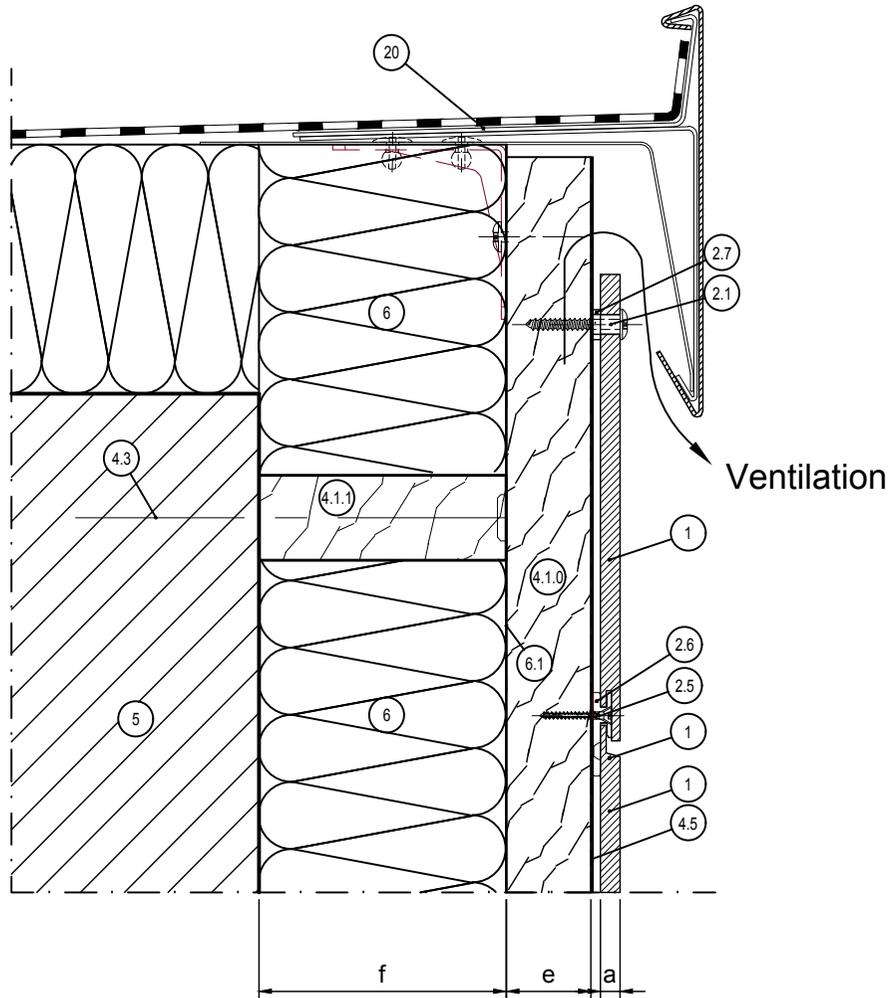

LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
2.5	Counter sunk screw (WÜRTH 0.137x1.18 inch, AW 20)
2.6	Universal clip
2.7	Installation ring
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity
20	Roof connection not part of TRESPA® delivery program

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)

Building / Department	Alg.		TRESPA®		Remarks
Revision	Drawn	Jan de Jonge	Passingen	A3	PURA FS v5.1
Date	Date	JAN 2016	r.s.o.	Size	Number
Scale	Name	1:2	Facade cladding with Trespa®		
			PURA FLUSH Siding		
			Detail v5.1 - Roof soffit		
			Revision	10	Sheet