

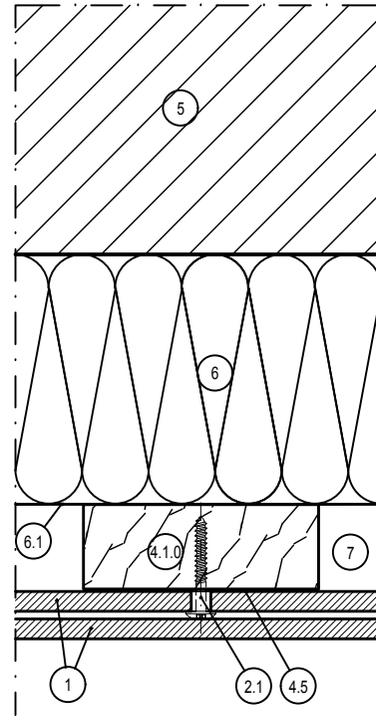


Horizontal section h1.1

Detail fixing points at continuous panels

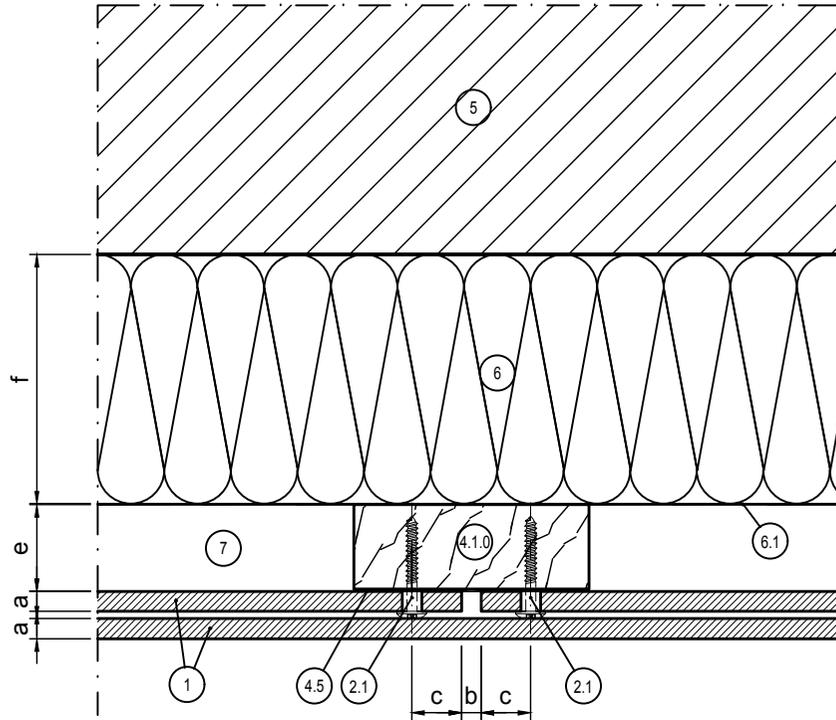

Detail fixing points (view)

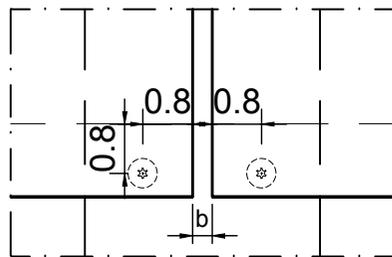


LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
b	Joint width 0.3 inch. Based on applicable building standards, regulations or certificates, wider joints may be permissible
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)


Building / Department	Alg.	Remarks	
Revision		TRESPA®	A3 PURA LS h1.1 0
Drawn	Jan de Jonge	Passagen	
Date	JAN 2016	i.s.o.	Size Number Revision Sheet
Scale	1:2	Name	Facade cladding with Trespa®
			PURA LAP Siding
			Detail h1.1 - Joint vertical

Horizontal section h2.1

LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity
9.5	Corner profile (PROFACE® CORNEX C250M-A)

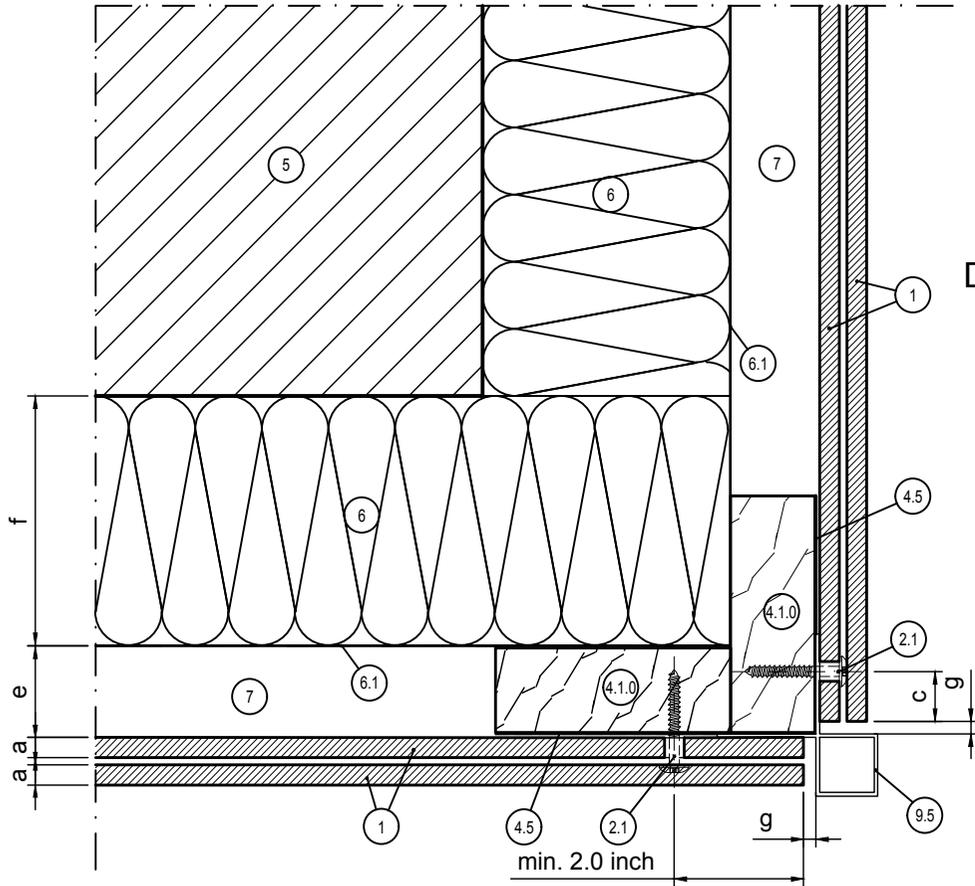

Detail edge clearance (view)

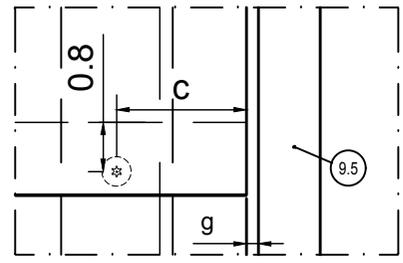


GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)
g	Distance min. 2 inch

Building / Department	Alg.	TRESPA	Remarks	
Revision			A3	PURA LS h2.1 10
Drawn	Jan de Jonge	Passagen	Size	Number
Date	JAN 2016	f.s.o.	Revision	Sheet
Scale	1:2	Name	Façade cladding with Trespa®	
Date			PURA LAP Siding	
			Detail h2.1 – External corner	

Copyright © 2015 by Trespa International B.V. This print is generated by you from www.trespa.info. By accessing www.trespa.info and printing this document you have accepted the Terms of Use (disclaimer) of www.trespa.info. Please refer to mentioned website for all conditions that apply to this document. Not all the systems shown in this document may be suitable for all applications and jurisdictions. We provide you with testing, code and design data for informational purposes only and strongly recommend that you or any other user of this document obtains independent advice regarding compliance with design requirements, applicable codes, laws and regulations, and test standards. Please check your local codes and design requirements for proper use. Trespa International B.V. disclaims all liability in relation to your use of this document.

Horizontal section h3.1

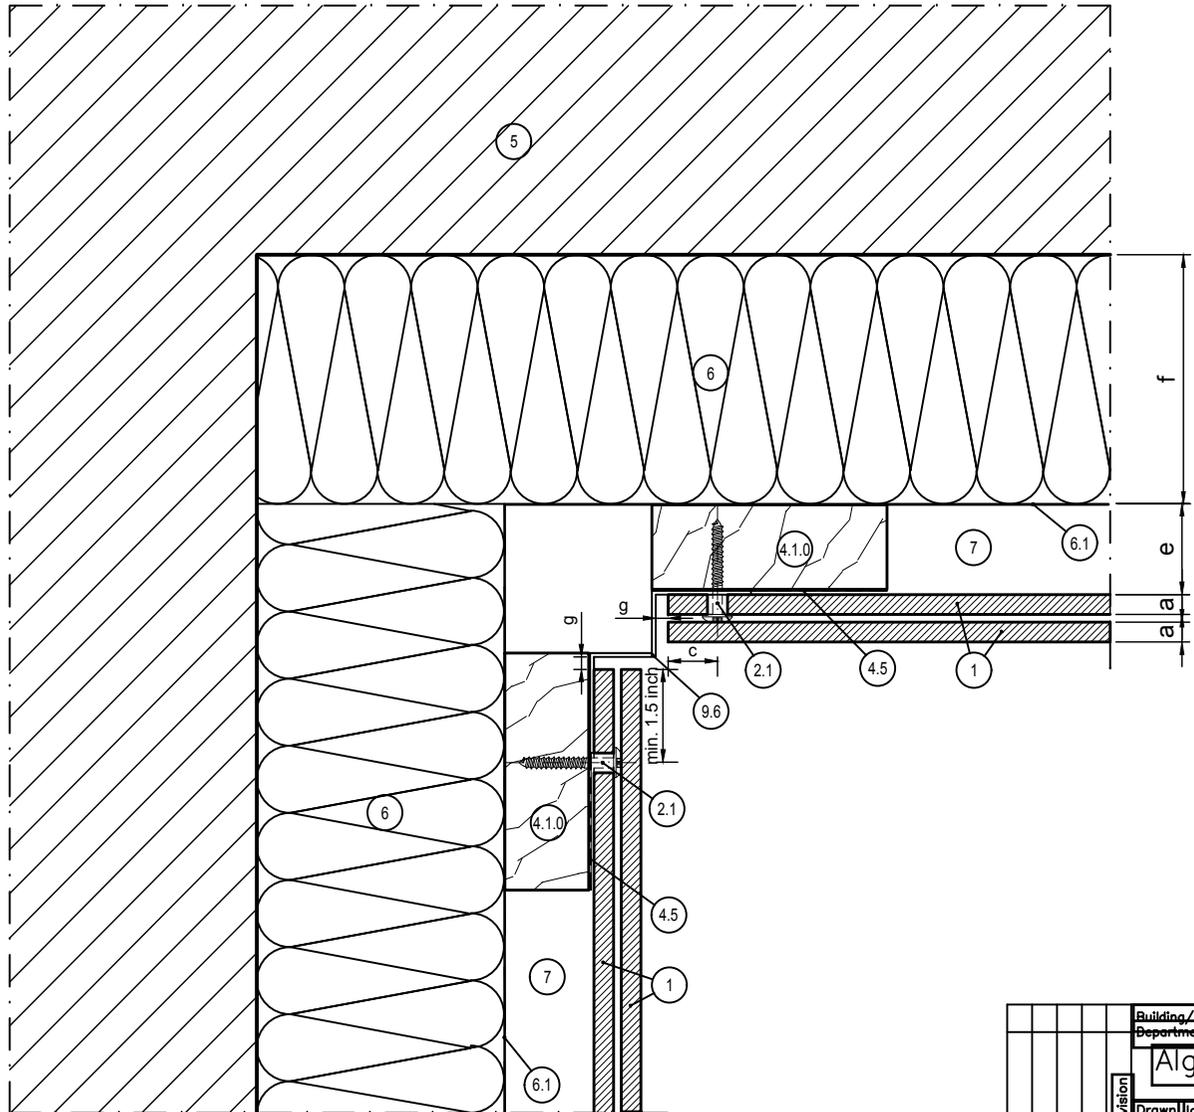


LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity
9.6	Inner corner profile (PROFACE® CORNIN CI250-A)

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)
g	Distance min. 2 inch

Building / Department	Alg.	TRESPA	Remarks
Revision	Drawn Jan de Jonge	Passagen	A3 PURA LS h3.1 0
Date	JAN 2016	i.s.o.	Size Number Revision Sheet
Scale	1:2	Name	Facade cladding with Trespa® PURA LAP Siding
Date			Detail h3.1 – Internal corner

Horizontal section h4.1


LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity
9.1	Window sill
9.4	Wind seal
9.5	Corner profile (PROFACE® CORNEX C250M-A)

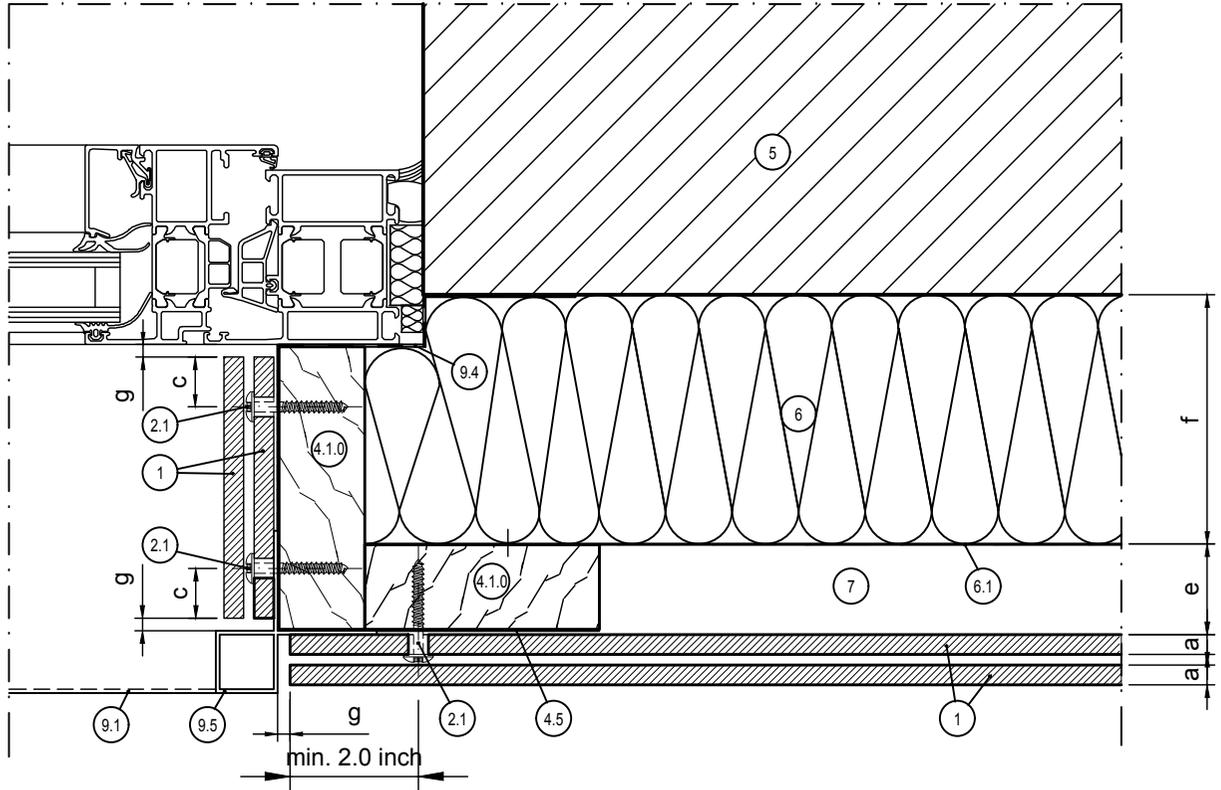

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)
g	Distance min. 2 inch


Building / Department	Alg.		TRESPA		Remarks
Revision	Drawn	Jan de Jonge	Passagen	A3	PURA LS h4.1
Date	Date	JAN 2016	i.s.o.	Size	Number
Scale	1:2		Name	Façade cladding with Trespa®	
Date				PURA LAP Siding	
				Detail h4.1 - Window reveal	

Overview

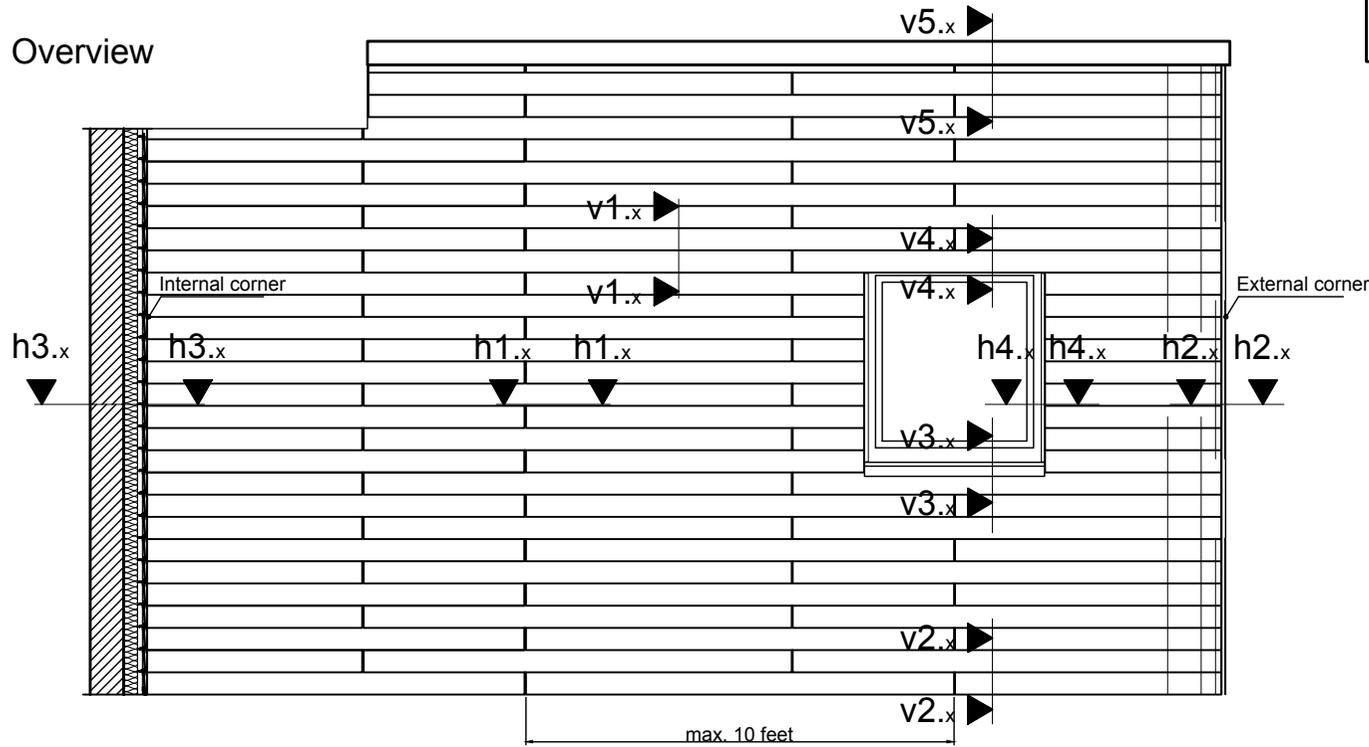


Maximum panel size and maximum fixing distance for façade cladding with Trespa® PURA NFC® please refer to the installation guidelines.

Detail fixation

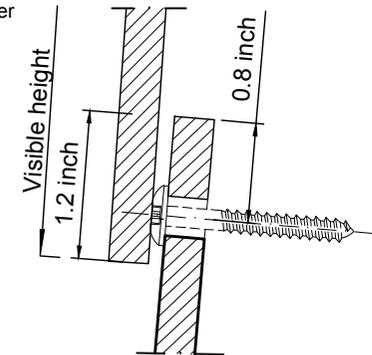


Visible height = 7.3 inch - 1.2 inch ≈ 6.1 inch

Top view

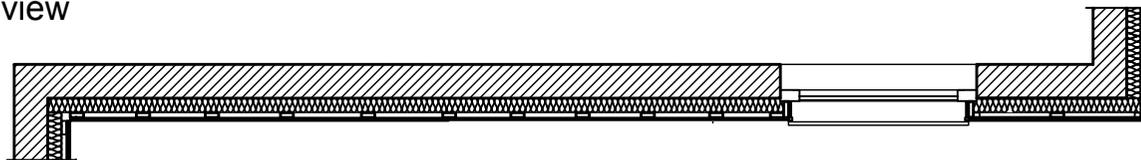

Building/Department	Alg.	TRESPA®		Remarks	
Revision		Drawn	Jan de Jonge	Passaigen	A3 PURA LS 02 0
Date	JAN 2016	r.s.o.		Size	Number
Scale		Name	Façade cladding with Trespa®		
			PURA LAP Siding		
			Overview 3D		
				Revision	Sheet

Vertical section v1.1

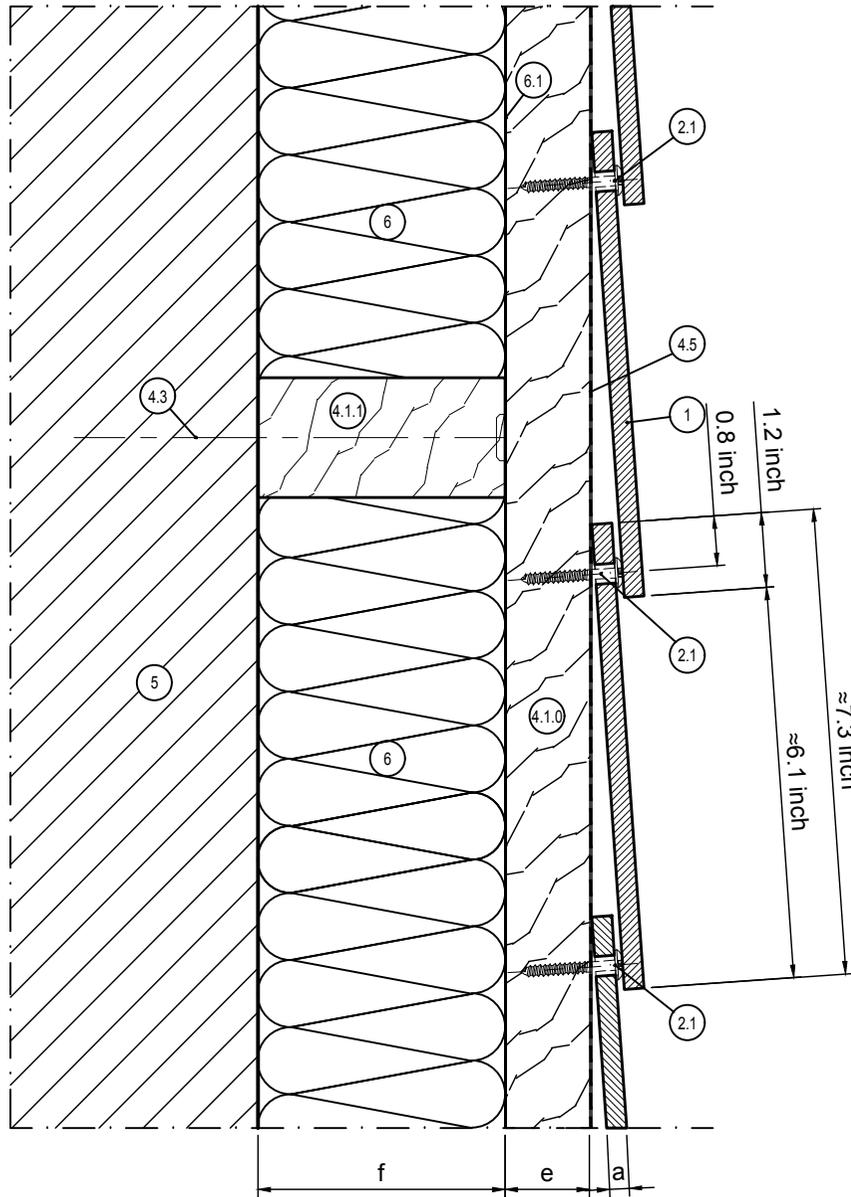


LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)

Building / Department	Alg.	TRESPA	Remarks	
Revision			A3	PURA LS v1.1 0
Drawn	Jan de Jonge	Passingen	Size	Number
Date	JAN 2016	r.s.o.	Revision	Sheet
Scale	1:2	Name	Façade cladding with Trespa®	
Date			PURA LAP Siding	
			Detail v1.1 - Panel overlap	

Vertical section v2.1

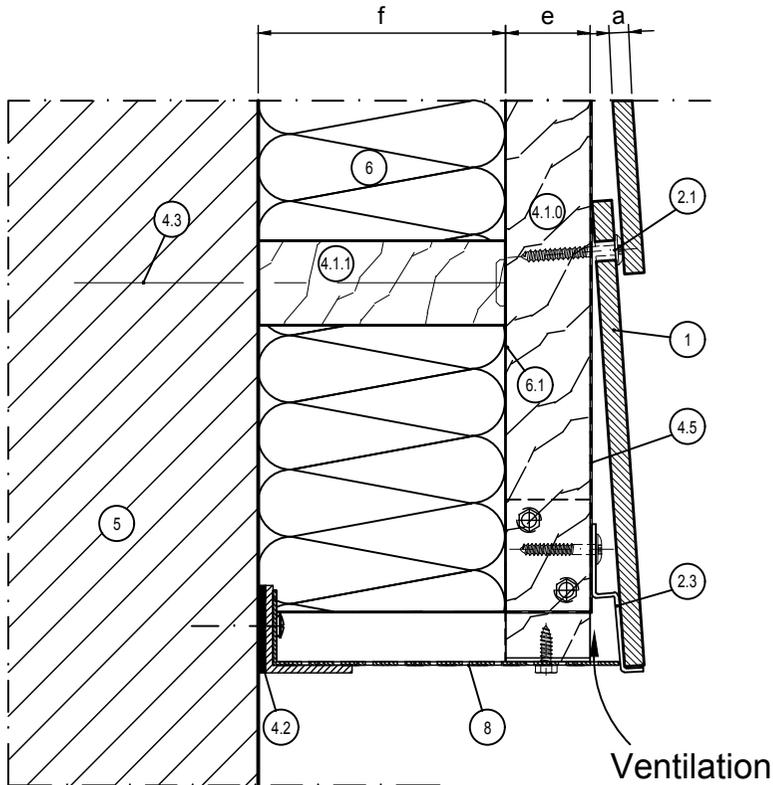


LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
2.3	Start profile (PROFACE® FINSTART FT90-A)
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.2	Thermal isolator
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
8	Perforated angle closure

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)

Building / Department	Alg.		TRESPA		Remarks
Revision	Drawn	He Jonge	Passaen	A3	PURA LS v2.1 A
Date	Date	JAN 2016	i.s.o.	Size	Number
Scale	1:2	⊕	Name	Façade cladding with Trespa®	
Date			PURA LAP Siding		
			Detail v2.1 - Façades base		

Vertical section v3.1

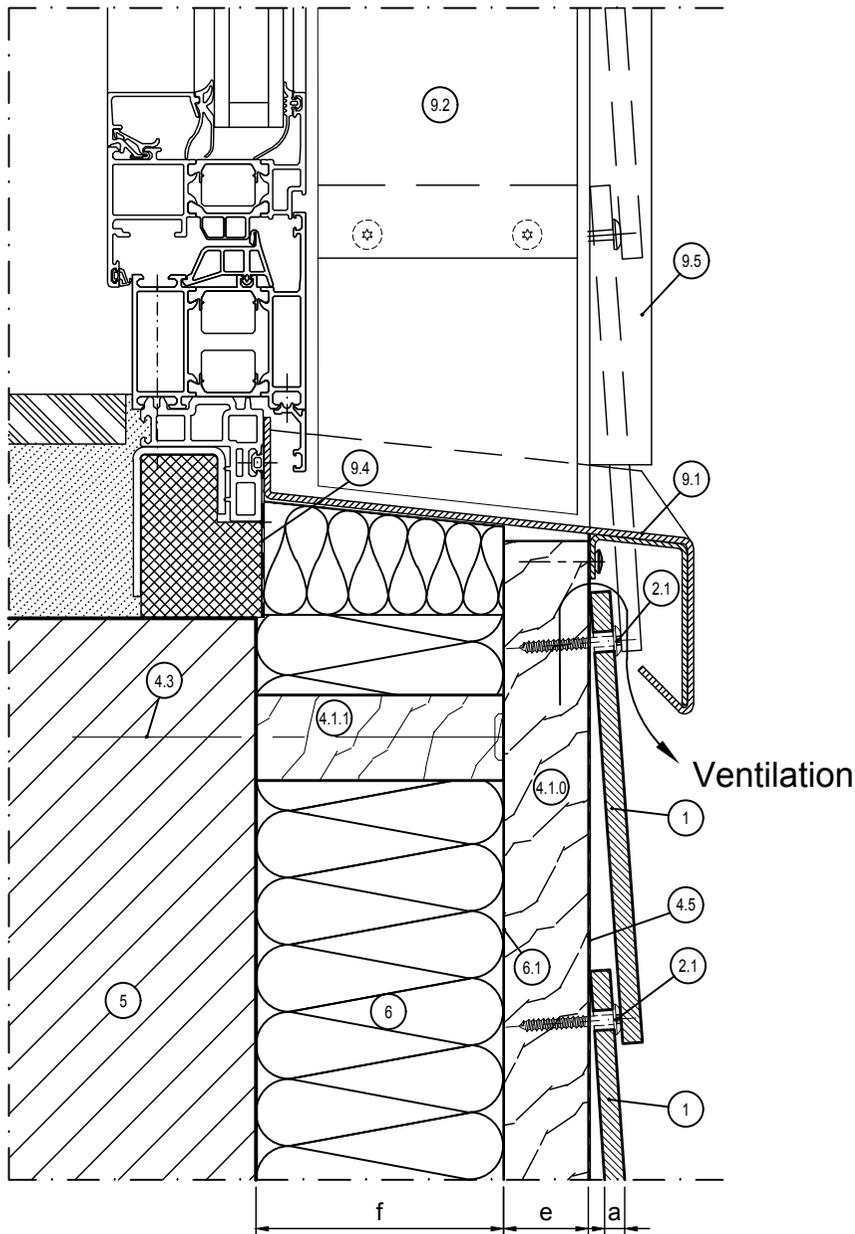


LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
7	Ventilated cavity
9.1	Window sill
9.2	Window reveal with TRESPA®
9.4	Wind seal
9.5	Corner profile (PROFACE® CORNEX C250M-A)

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)

Building / Department	Alg.	TRESPA		Remarks	
Revision		Size	A3	PURA LS v3.1	10
Drawn	Jan de Jonge	Name	Façade cladding with Trespa®		
Date	Nov 2015	Scale	1:2	PURA LAP Siding	
				Detail v3.1 - Window sill	

Copyright © 2015 by Trespa International B.V. This print is generated by you from www.trespa.info. By accessing www.trespa.info and printing this document you have accepted the Terms of Use (disclaimer) of www.trespa.info. Please refer to mentioned website for all conditions that apply to this document. Not all the systems shown in this document may be suitable for all applications and jurisdictions. We provide you with testing, code and design data for informational purposes only and strongly recommend that you or any other user of this document obtains independent advice regarding compliance with design requirements, applicable codes, laws and regulations, and test standards. Please check your local codes and design requirements for proper use. Trespa International B.V. disclaims all liability in relation to your use of this document.

Vertical section v4.1

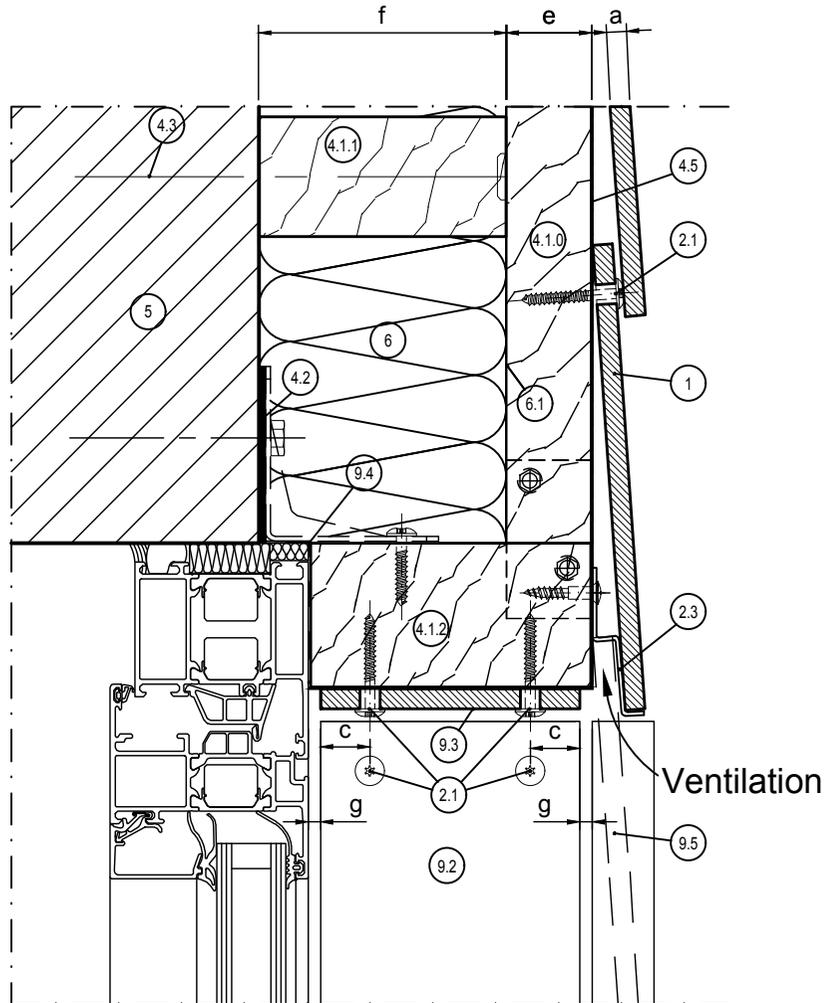


LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
2.3	Start profile (PROFACE® FINSTART FT90-A)
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.1.2	Partial wooden substructure
4.2	Thermal isolator
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
9.2	Window reveal with TRESPA®
9.3	Window head with TRESPA®
9.4	Wind seal
9.5	Corner profile (PROFACE® CORNEX C250M-A)

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
c	Edge clearance min. 0.8 inch, max. 10 x panel thickness
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)
g	Distance min. 2 inch

Building / Department	Alg.		TRESPA		Remarks
Revision	Drawn	Jan de Jonge	Passingen	A3	PURA LS v4.1
Date	Date	JAN 2016	i.s.o.	Size	Number
Scale	Name	1:2	Façade cladding with Trespa		
Date	PURA LAP Siding				
	Detail v4.1 - Window head				

Copyright © 2015 by Trespa International B.V. This print is generated by you from www.trespa.info. By accessing www.trespa.info and printing this document you have accepted the Terms of Use (disclaimer) of www.trespa.info. Please refer to mentioned website for all conditions that apply to this document. Not all the systems shown in this document may be suitable for all applications and jurisdictions. We provide you with testing, code and design data for informational purposes only and strongly recommend that you or any other user of this document obtains independent advice regarding compliance with design requirements, applicable codes, laws and regulations, and test standards. Please check your local codes and design requirements for proper use. Trespa International B.V. disclaims all liability in relation to your use of this document.

Vertical section v5.1

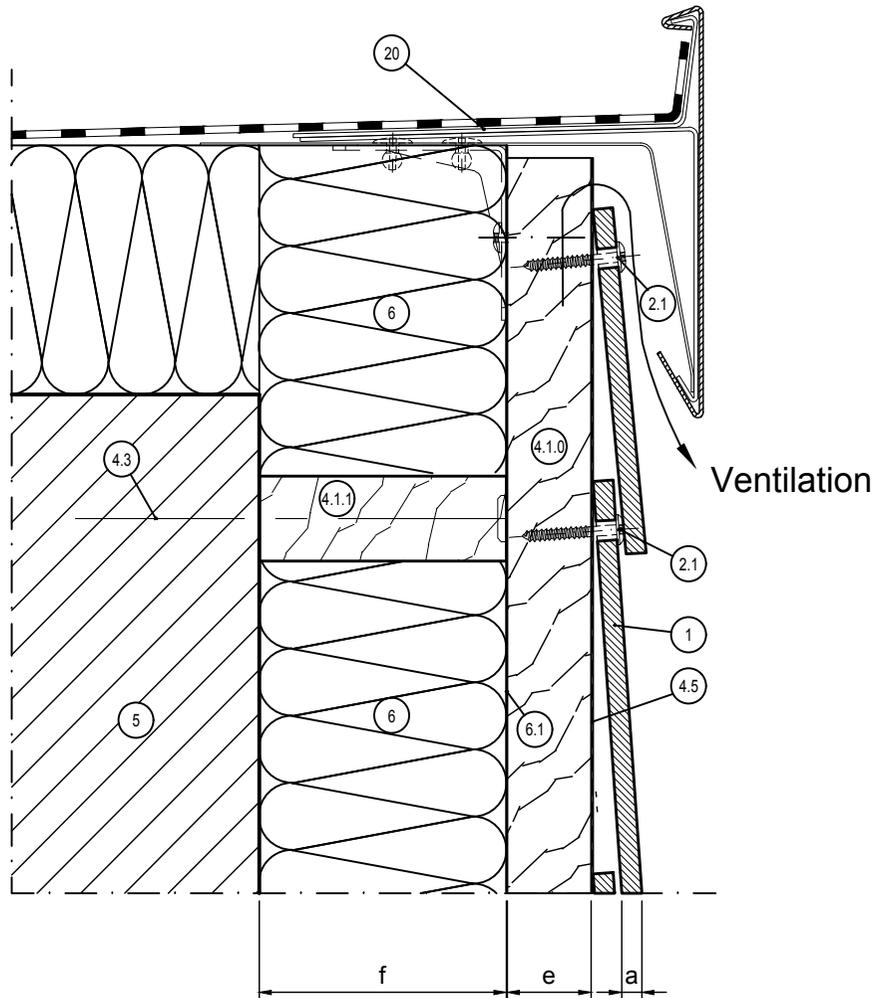

LEGEND:	
1	Trespa® PURA NFC® panel
2.1	Fast fix screw (SFS Intec RVS A2 0.2 x 1.5 inch)
4.1.0	Vertical wood batten (min. 37 - 43 x 1.3 inch)
4.1.1	Horizontal counter batten
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	Weather barrier membrane
20	Roof connection not part of TRESPA® delivery program

GENERAL INFORMATION:	
a	Panel thickness 0.3 inch
e	Ventilation min. 0.8 inch. Recommended max. cavity depth (between rainscreen cladding and insulation): 2 inch. Ventilation inlets and outlets min. 2.36 inch ² /foot
f	Insulation (thickness)

Building / Department	Alg.		TRESPA		Remarks
Revision	Drawn	Jan de Jonge	Passingen	A3	PURA LS v5.1
Date	Date	JAN 2016	r.s.o.	Size	Number
Scale	1:2	⊕	Name	Facade cladding with Trespa®	Revision
Date				PURA LAP Siding	Sheet
				Detail v5.1 - Roof soffit	