


# Stick Curtain Wall System



# Stick Curtain Wall System



Stick curtain wall are processed, manufactured at factory and assembled, installed and completed at site. This kind of curtain wall can be used for all outside surface system types of buildings.

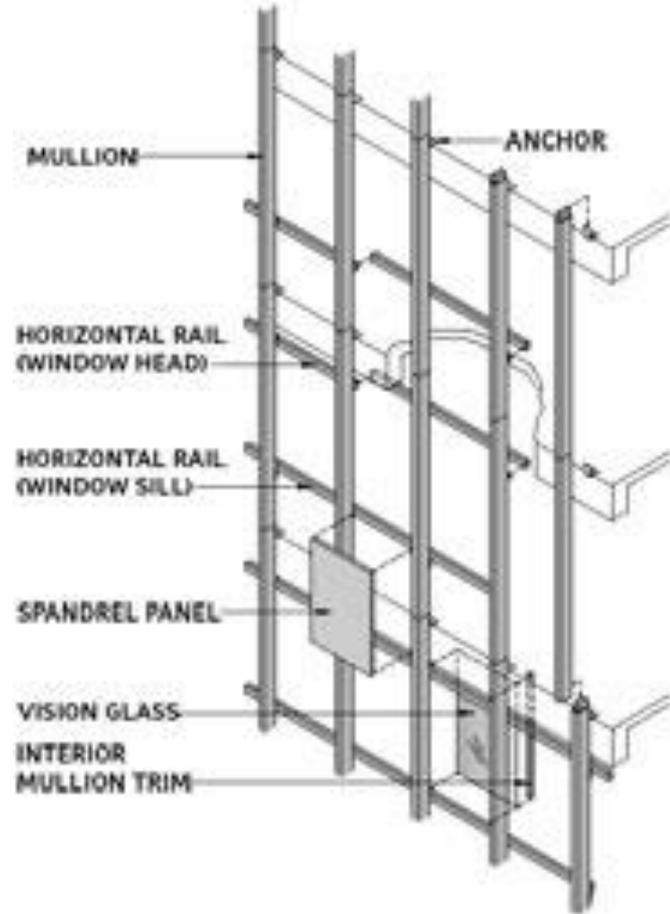




# Stick Curtain Wall Installation

Stick curtain wall comprise of serious vertical mullions and horizontal members transoms that form a grid this grid is used to restrain either solid panels or glass using rubber gaskets and it's normally fixed to the floor edge by brackets with provide wind restraints.





The self weight of the curtain wall is normally taken to the round thorough the mullions. Mullions spacing are normally in the range of 1.2 to 2 meters Wider spacings are possible. Transom spacings are normally determined by panel requirements

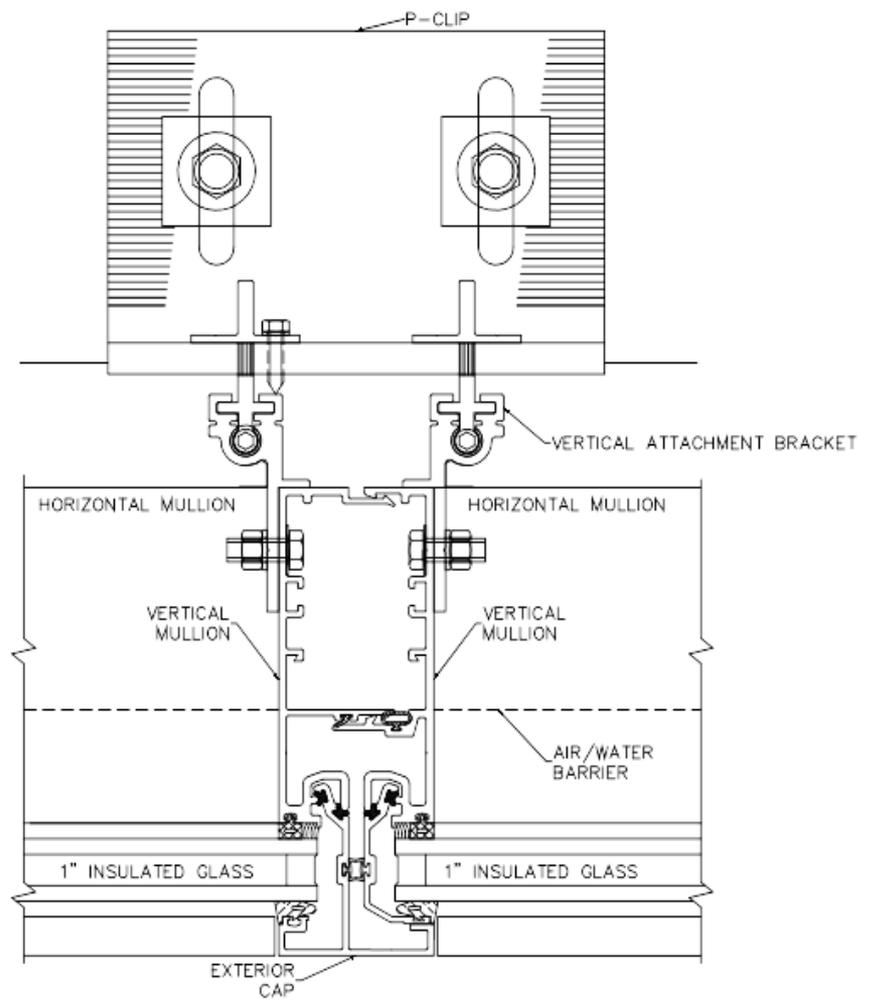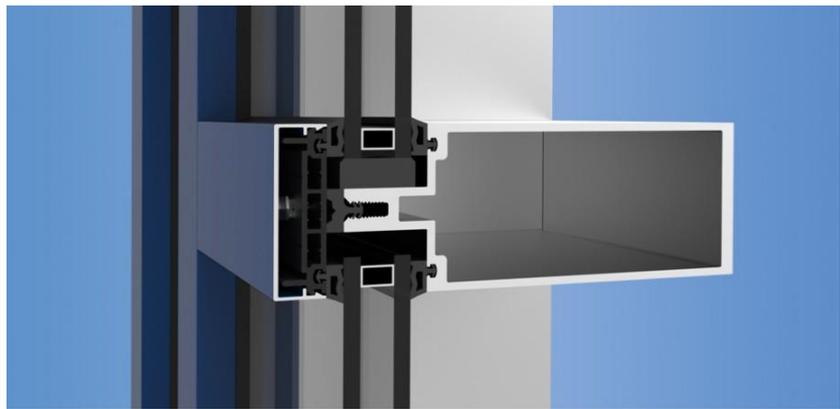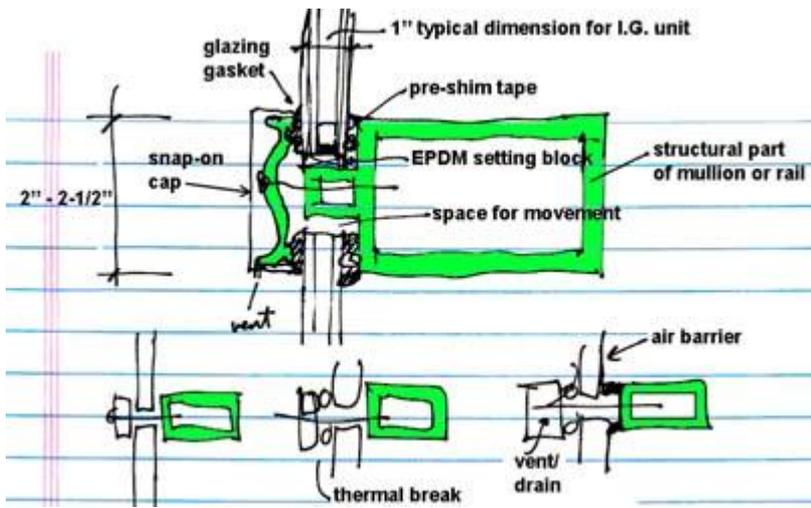

# precast concrete

The concept of precast (also known as “prefabricated”) where the majority of concrete are produced in plants in a location away from the building, and then transported to the site for assembly. These precast concrete are manufactured by methods based on mass production in order to build a large number of buildings in a short time at low cost.

